GRIESSER

Awnings from Griesser.
G 4000

G 4000

The image of the G 4000 awning system combines beauty and strength. From the completely enclosed cassette awning with its perfect protection against wind and weather to the recessed niche installation making it flush to the facade. Truly, the G 4000 fits in everywhere.

Product highlights G 4000

Open cassette – perfect for wall installation
The G 4000 cassette awning is open towards the wall side.

outstandingly suitable for wall installation, e.g. under protruding roofs
exact closing and optimum protection for fabric and technology thanks to the attractively shaped front bar

Closed cassette – even more protection thanks to rear wall
The G 4000 is completely closed thanks to an additional rear wall.

for every building situation
equally suitable for wall installation, ceiling installation and rafter installation, thanks to the rear wall profile

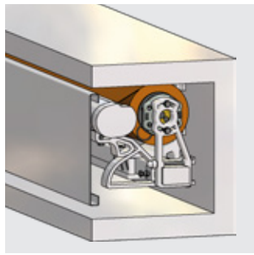

Niche cassette – for flush closing with the facade
The G 4000 is specially designed for niche installation.

embedded in the building facade
flush closing of the front bar with the building facade
permanent closing of the front bar, thanks to the pivoted joint

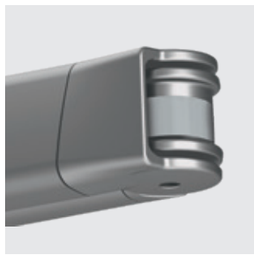

LongLife Arm – long-lasting and low-noise
exceptionally robust high-tech belt, tested for more than 100 000 cycles
extremely quiet running
maintenance-free, all arm joints made of drop-forged aluminum, lightweight, rugged and – shatterproof – like the chassis of a Boeing
very high arm tension for excellent fabric positioning

Fabric collections, colors and controls

Fabric collection

my **collections 2**

In our 3-part collection **modern** basics blue® • ever**more** • hi **hello**! you too will discover your favorite design. Choose a proven and tested fabric or our excellent, no-compromise recycled material. Be it timeless harmonious tones or creative trends – you will always find the right fabric for every style and every awning.

Our colors

Griesser Bestseller Colors

RAL 9010	RAL 9016	RAL 9006	VSR 140 - Metallic
RAL 9007/VSR 907	RAL 7022	RAL 7016	RAL 8019

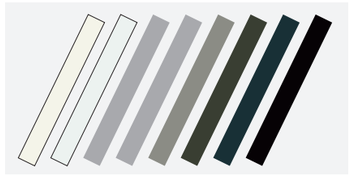

Surface structure
Semi-gloss

WiGa-Trend Special Colors (Option)

Approx. RAL 9010	Approx. RAL 6009	Marrone 04 Metallic	Sparkling Iron Effect
Approx. RAL 7016	Approx. DB 703 Metallic	Iron Glimmer Effect P7	Approx. RAL 9006 Metallic
Approx. RAL 9007 Metallic			

Scratch-resistant and resistant in noble structure optics.

Controls

G 4000 can be operated through a variety of control systems, from a simple handheld transmitter to a master control or a building management system, depending on the time, position of the sun and the weather.

Technology in detail

G 4000	
Max. width	1-section: 700 cm 2-section: 1200 cm
Max. projection	400 cm
Cassette size width x height	20.0 cm x 21.1 cm
For niche type	22.0 cm x 21.0 cm
Motor drive	O
Crank drive	● (only 1-section)
Incline adjustment	5° - 40°
Volant	O
Radio control	O
Installation options	Wall installation Ceiling installation Rafter installation
Name of awning	LongLife arm
my **collections 2**	●

Key
● standard
O optional

*Dimension G 4000 niche
max. 600 x 350 cm
Inclination 5° - 20° / 10°

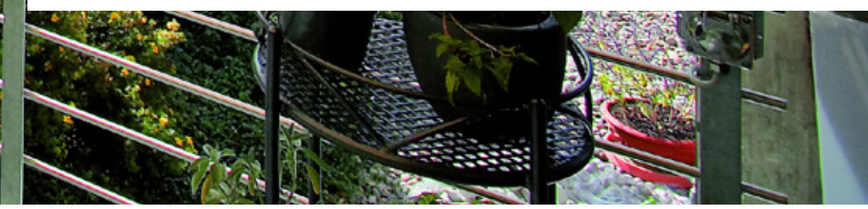

Your partner:

Griesser solar shading – Quality since 1882.
www.griesser.com

01.2024 – Subject to change without prior notice
Item no. 183079